



Energy savingSaves money on cooling bills





Spectrally selective

Visible light is transmitted, IR is rejected



Medium level of light transmission





Manufacturer

Madico Window Films, USA



35 years of experience

One of the longest-operating distributors in the industry

Low darkening effect



Efficient


High performance even on advanced glazings



UV protection

Protects your health and your valuables

Energy saving on various window systems

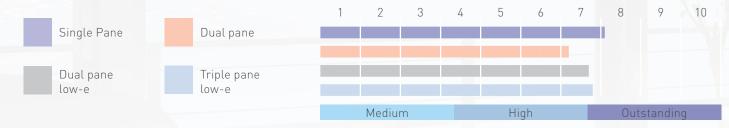

Save energy with window films!

	Single Pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	71%	62%	67%	68%
Visible Light Transmitted	32%	30%	29%	27%
Visible Light Reflected Exterior	48%	49%	44%	45%
Visible Light Reflected Interior	46%	51%	50%	51%
Total Solar Energy Reflected	42%	46%	49%	47%
Total Solar Energy Absorbed	39%	37%	36%	40%
Total Solar Energy Transmitted	19%	17%	15%	13%
SHGC	0,29	0,36	0,32	0,32
UV Rejection	99%	99%	99%	99%
U-Value	5,34	2,56	1,4	1,16
Compatibility	Compatible	Compatible	Compatible	Compatible



Interior/exterior
Interior



Thickness 38 microns (1.5 mil)



AdhesivePressure sensitive



2nd generation



Sizes available 1.52×30 m (60"×100')



Warranty 10 years